

## Metric Feeler Gauge


- Material: blade made of spring steel

**77328-26**

- 26 blades inch feeler gauge

CONTENTS :


- 0.0015", 0.002", 0.0025", 0.003",
- 0.004", 0.005", 0.006", 0.007",
- 0.008", 0.009", 0.010", 0.011",
- 0.012", 0.013", 0.014", 0.015", 0.016", 0.017", 0.018", 0.019", 0.020",
- 0.021", 0.022", 0.023", 0.024", 0.025"
- 0.038, 0.051, 0.063, 0.076, 0.102, 0.127, 0.152, 0.178, 0.203, 0.229, 0.254, 0.279, 0.305, 0.330, 0.356, 0.381, 0.406, 0.432, 0.457, 0.483, 0.508, 0.533, 0.559, 0.584, 0.610, 0.635 mm



| KT NO.   | Number of blades | Width x Length of blades (mm) |    |          |
|----------|------------------|-------------------------------|----|----------|
| 77328-26 | 26               | 12.7 x 76                     | 91 | 14 / 168 |

## Roller Chain Detacher

**3214**

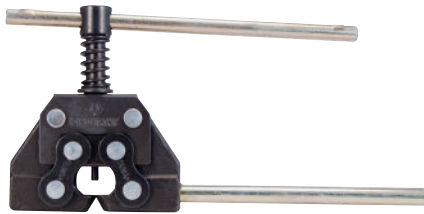

| KT NO.  | For chain size ANSI NO. |     |        |
|---------|-------------------------|-----|--------|
| 3214-35 | 35~50                   | 310 | 1 / 60 |
| 3214-60 | 60~100                  | 691 | 1 / 20 |

## Retractable Tool Lanyard

**79A21-30**

**79A22-30**

- Retractable tool lanyard
- 3 kgs maximum tool weight
- Nylon tether with steel spring inside to absorb the shock of a dropped tool
- Increases safety and productivity
- Ergonomically designed length




79A21-30



79A22-30



| KT NO.   | Capacity mm | Hook         |     |          |
|----------|-------------|--------------|-----|----------|
| 79A21-30 | 800~1300    | 2 lock snaps | 106 | 12 / 144 |
| 79A22-30 | 800~1300    | fixed loop   | 89  | 12 / 144 |

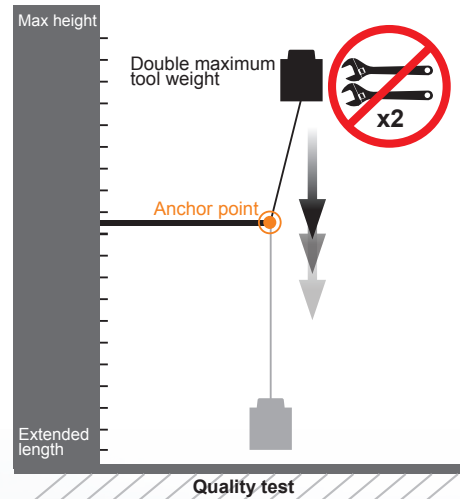

- The retractable tool lanyards are developed according to KING TONY standard. The steel lanyards are tested by double maximum weight and dropped from height. Product quality is approved.

