


Hydraulic Mechanical Pullers

9BA

- Quick and safe removal particularly large and tight gears, bearings, etc...
- Two and three jaws type, use for different space

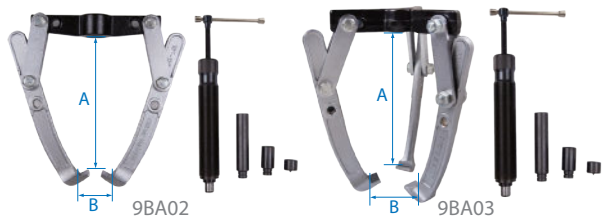

KT NO.	Capacity (Tons)	Jaws (leg)	Spread A(mm)	Reach B(mm)	kg	1/1
9BA02	15T	2	320	500	11.30	1 / 1
9BA03	15T	3	320	500	16.50	1 / 1

9BA33

- Easy and fast removing ball bearing by using the puller
- Select proper tips by ball diameter

CONTENTS :


- 1 PC. Puller yoke and center screw
 - 1 PC. Top Nut
 - 2 PC. Extension rod x L 170mm
- Ball ended threaded adapter :
- 2 PC. 15.0mm / 2 PC. 17.4mm
 - 2 PC. 20.0mm / 2 PC. 25.2mm
 - 2 PC. 30.0mm / 2 PC. 36.4mm



kg 8.00 1 / 3



16 PC.

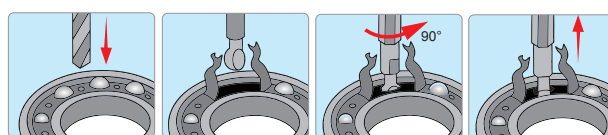

Universal Bearing Puller Set



9BA31

- Easy and fast removing ball bearing by using the puller
- Select proper tips by ball diameter

CONTENTS :

- 1 PC. Puller yoke and center screw
 - 1 PC. Top Nut
 - 2 PC. Extension rod x L 105mm
- Ball ended threaded adapter
- 2 PC. 5.5mm / 2 PC. 6.0mm / 2 PC. 8.0mm

kg 1.33 1 / 12



10 PC.



Slide Hammer Gear Puller Set

796401MR

Slide Hammer Puller Set

- For jobs involving pull and grip gears, bearings, outer races, grease retainers, oil seals, etc.
- 2.6 lbs(1.2 kgs) slide hammer
- 400 mm length T-handle puller
- 3-in-1 hammer puller, to handle inside pull such as bearing cups and outer races, as well as regular outside pull jobs

kg 4.50 1 / 4




6 PC.

CONTENTS:

- 1 PC. 400 mm T handle shaft
- 1 PC. 2.6 lbs / 1.2 kgs hammer
- 1 PC. Adjustable nut
- 1SET Internal gear puller for Ø15-30mm(A)
- 1SET Internal gear puller for Ø30-80mm(B)
- 1SET External gear puller for Ø15-80mm(C)

Items	D (mm)	Capacity
Internal gear puller	6	Ø 15-30mm
Internal gear puller	10.5	Ø 30-80mm
External gear puller	10.5	Ø 15-80mm

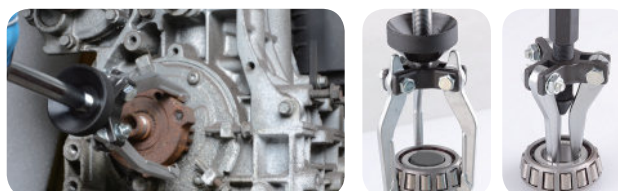

9BA32

1/2"

- Easy and fast removing ball bearing by using the puller
- Select proper tips by ball diameter

CONTENTS :

- 1 PC. Puller yoke and center screw
 - 1 PC. Top Nut
 - 2 PC. Extension rod x L 100mm
- Ball ended threaded adapter
- 2 PC. 11.0mm / 2 PC. 12.5mm / 2 PC. 15.0mm

kg 2.00 1 / 12



10 PC.

