


T-type Deep Socket Wrench

115HM


- Shank material - chrome vanadium alloy steel
- Shank finishing - chrome plated
- Grip material - PP

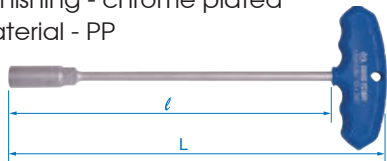

KT NO.	Size mm	ℓ mm	L mm	Weight	Pkg
115H05M-10	5	260	300	140.0	12 / 96
115H06M-10	6	260	300	147.0	12 / 96
115H07M-10	7	260	300	161.8	12 / 96
115H08M-10	8	260	300	159.0	12 / 96
115H09M-10	9	260	300	161.2	12 / 96
115H10M-10	10	260	300	170.6	12 / 96
115H11M-10	11	260	300	203.4	12 / 96
115H12M-10	12	260	300	205.0	12 / 96
115H13M-10	13	260	300	204.6	12 / 96
115H08M-14	8	350	388	147.0	10 / 60
115H10M-14	10	350	388	153.0	10 / 60
115H13M-14	13	350	390	261.0	8 / 32

1184M

- T-shaped deep socket wrench
- Chrome vanadium alloy steel
- DIN 475

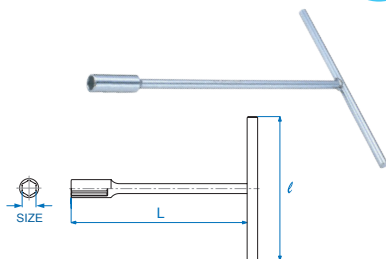


KT NO.	Size mm	ℓ mm	L mm	Weight	Pkg
118406M	6	120	190	53	10 / 40
118407M	7	120	190	73	10 / 40
118408M	8	200	300	212	10 / 60
118409M	9	200	300	307	10 / 60
118410M	10	200	300	317	10 / 60
118411M	11	200	300	327	10 / 60
118412M	12	200	300	328	10 / 60
118413M	13	200	300	333	10 / 60
118414M	14	200	300	345	10 / 60
118417M	17	250	300	602	6 / 36

T-type Standard Socket Wrench

1185M

- T-shaped standard socket wrench
- Chrome vanadium alloy steel
- DIN 475




KT NO.	Size mm	ℓ mm	L mm	Weight	Pkg
118508M	8	200	250	186	10 / 100
118509M	9	200	250	231	10 / 100
118510M	10	200	250	228	10 / 100
118511M	11	200	250	234	10 / 100
118512M	12	250	250	386	10 / 60
118513M	13	250	300	421	10 / 60
118514M	14	250	300	429	10 / 60
118517M	17	300	300	710	6 / 36
118519M	19	300	300	725	6 / 36

T-type Spark Plug Socket

1563


- T-type 25° universal spark plug socket (RUBBER)
- Chrome vanadium alloy steel

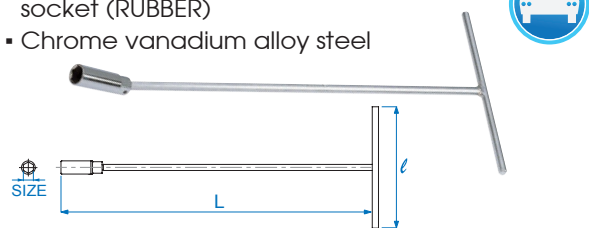

KT NO.	Size mm	ℓ mm	L mm	Weight	Pkg
15631612	16	200	300	363	10 / 40
15631615	16	200	385	400	10 / 40
15631618	16	200	460	450	10 / 40
15631818	18	200	460	450	10 / 40
15632112	21	200	300	388	10 / 40
15632115	21	200	385	438	10 / 40
15632118	21	200	460	488	10 / 40

1566

- T-type 25° universal spark plug socket with magnet
- Chrome vanadium alloy steel

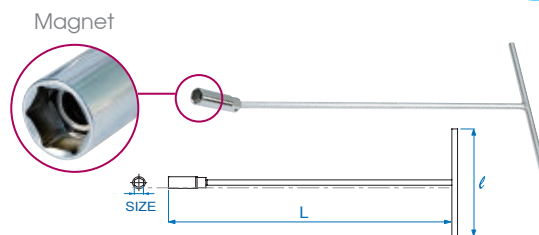

KT NO.	Size mm	ℓ mm	L mm	Weight	Pkg
15661612	16	200	300	400	10 / 40
15661615	16	200	385	420	10 / 40
15661618	16	200	460	460	10 / 40
15661818	18	200	460	450	10 / 40
15662112	21	200	300	420	10 / 40
15662115	21	200	385	460	10 / 40
15662118	21	200	460	510	10 / 40

